

# BÄRO

Retail  
Lighting

# Ontero XR Track

UNUSUAL AND ELEGANT

The Ontero XR surface-mounted luminaires are little power packs for track-mounting. The lighting head made of die-cast aluminium features clear lines.

The format of the new driver electronics is configured to the compact luminaire design. The driver electronics are accommodated in the redesigned power adapter.

As a project partner and system supplier, BÄRO Retail Lighting offers innovative lighting solutions for all formats in the multi-faceted world of retail: "Fresh Light for Fresh Products".



#### Applications

- General lighting
- Accent lighting
- Fresh food lighting
- Product presentation

#### Benefits

- 8 Light colors
- 4 Beam characteristics
- 3 Wattages
- 2 Fixture colors
- 2 Mounting options
- 1 Dimming option
- $\pm 85^\circ$  Pivot angle
- $\pm 200^\circ$  Swivelling angle
- 5 years limited warranty



0-10V

BÄRO North America, Inc.  
10545 Baur Boulevard  
St. Louis, MO 63132

P (314) 692-BAR0 (2270)  
M info@baerousa.com  
www.baerousa.com

# High lighting quality in a compact design

## PRODUCT OVERVIEW

Type: Track  
 Power option: 23 W, 34 W and 41 W  
 Lumen output: 3,840 lm@41 W, 940, 94 lm/W  
 Light color: 2,700 K, 3,000 K, 3,500 K, 4,000 K  
 GoldenBread, Sun, Meat&Fish, SpecialMeat

## MOUNTING OPTIONS

Eutrac 120 V, 277 V

## ELECTRICAL

Input voltage: 120 V/277 V  
 Input frequency: 50/60 hz  
 System power factor:  
 > 0.95

## RATINGS

Operating Temperature: 40°F to 100°F  
 Location: UL Dry  
 Safety: CSA Certified  
 Performance: DLC Premium  
 Lifetime: 50,000 h > 80%

## REFLECTOR OPTIONS


3 rotational-symmetrical  
 (Spot 20°, Medium 25°, Flood 44°)  
 1 asymmetrical (OvalBasic 60° x 40°)  
 OvalBasic can be pivoted by 90°

## FIXTURE FINISH OPTIONS

Black, White




Ontero XR with Medium-Reflector

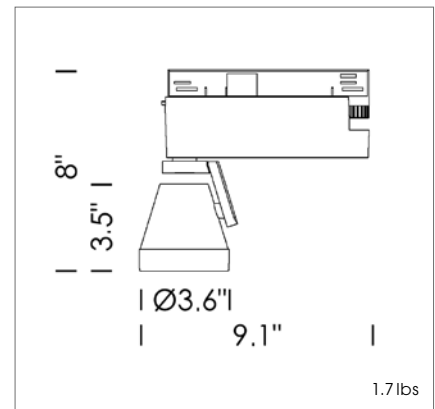

1.7lbs

## ONTERO XR MODEL NUMBER BREAKDOWN (I.E. OXR930LF-OBE1-2)

OXR	930	L	F	OB	E1	2						
Fixture designation	Array	Description	Power	Description	Dimming	Description	Reflector	Description	Track adapter	Description	Paint color	Description
OXR	927	2,700 K	L	Low 23 W	F	Fixed output	OB		E1	Eutrac 120 V	2	Black
	930	3,000 K	M	Mid 34 W	D	0-10 dimmable	FL		E2	Eutrac 277 V	6	White
	935	3,500 K	H	High 41 W			M					
	940	4,000 K		MFS available up to 34 W			SP					
	GBR	GoldenBread										
	SUN	Sun										
	MFS	Meat&Fish										
	SM	SpecialMeat										
		MFS available up to 34 W										

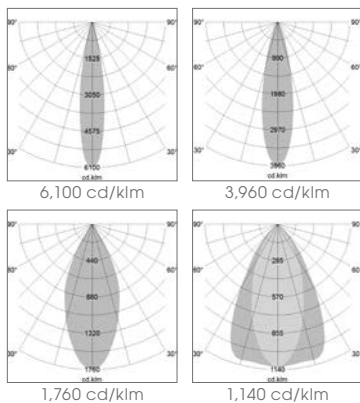

	927	930	935	940	Golden Bread	Sun	Meat& Fish	Special Meat
TM30-18 (RF/RG)	91/98	88/103	89/103	90/98	89/94	83/116	85/114	81/121
CRI	>90	>90	>90	>90	~88	~85	~70	~82
23 W	2,170	2,220	2,260	2,510	2,300	1,520	1,560	1,320
34 W	2,850	2,920	2,980	3,310	3,010	1,970	2,030	1,720
41 W	3,310	3,400	3,460	3,840	3,480	2,260	-	1,980

Luminous flux (lm)

The luminaire luminous flux figures vary in a tolerance range of ±10%. All data are typical values. System features may change if product improvements are made due to technical advances. Errors excepted.